
déanta

Technical Data Sheet

FRFLUSHOK EI30

EI30

OAK DOOR

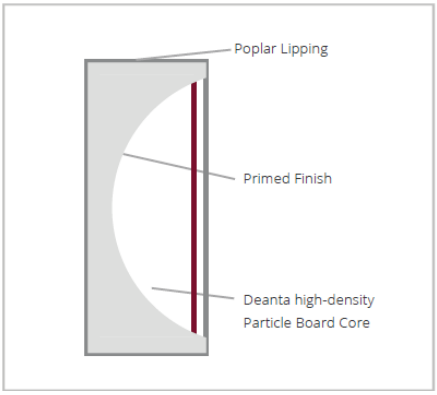



Timber Fire Door Manufacture

bmtrada Q-MARK CERTIFICATION

UKAS PRODUCT CERTIFICATION 0012

QUALITY CONTROL CHECKS

Type; Design	Fire Rated EI30
Construction	Solid Core
Durability	Pass
Finish	Oak Vaneer

SPECIFICATIONS

Product Type	Internal door – SC (Solid Core)
Intended use	Internal door
Lipping (stiles)	11mm Solid Oak
Lipping (rails)	11mm Solid Oak
Inner Lipping	N/A
Stiles and Rails	44mm(Particle Board Core)
Beadings	N/A
Panels	N/A
Door Finish	Oak (Vaneer)
Door Weights	30-54 KG

SIZES AVAILABLE

2032 x 864 x 44mm
2032 x 813 x 44mm
1981 x 762 x 44mm
1981 x 711 x 44mm
1981 x 660 x 44mm
1981 x 610 x 44mm
2040 x 826 x 44mm
2040 x 926 x 44mm
2040 x 1026 x 44mm

FINISHES AVAILABLE

Oak

Primed

FIRE TESTING

Successfully fire tested in accordance with the requirements of **EN 1634-1**.
Certification Number: **WF399992 Rev E**

Head Office: Dingle Road, Curraheen, Tralee, Co. Kerry, V92 EH6E.
Dublin Warehouse: 2 Cloverhill Industrial Estate, Dublin 22, D22 VP70.
P: (066) 71 94828 | W: www.deantadoors.ie | E: sales@deantadoors.ie