
déanta

Technical Data Sheet

FRFLUSH EI30

EI30

PRIMED DOOR

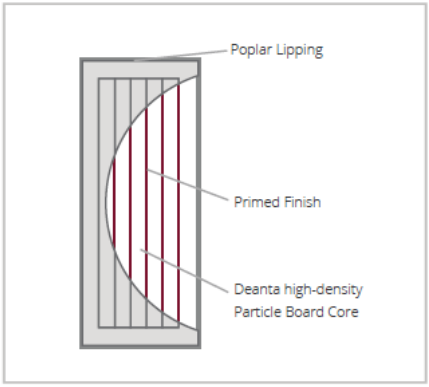

QUALITY CONTROL CHECKS

Type; Design	Fire Rated EI30
Construction	Solid Core PBC
Durability	Pass
Finish	Primed RAL 9007 White (Water based) Matt

SPECIFICATIONS

Product Type	Internal door – Solid Core
Intended use	Internal fire door
Lipping (stiles)	25 mm Poplar
Lipping (rails)	25 mm Poplar
Inner Lipping	N/A
Stiles/Rails/Core	Particle Board Core
Beadings	N/A
Panels	N/A
Door Finish	Primed RAL 9007 White (Water based)
Door Weights	37-64 KG

SIZES AVAILABLE

2040 x 1026 x 44mm
2040 x 926 x 44mm
2040 x 923 x 44mm
2040 x 826 x 44mm
2040 x 726 x 44mm
2040 x 526 x 44mm
2032 x 826 x 44mm
2032 x 813 x 44mm
1981 x 762 x 44mm
1981 x 711 x 44mm
1981 x 660 x 44mm
1981 x 610 x 44mm
1981 x 838 x 44mm

ACOUSTIC RATING

31dB *Dropseals & Strips TBF
Exova Acoustics Ability Report:
BS EN ISO 10140-2:2010 / WYC384767

FIRE TESTING

Successfully fire tested in accordance with the requirements of **EN 1634-1**.
Certification Number: **WF399992 Rev E**
Efectis Extended Application Report: **EFR-23-005536-EXAP**

Timber Fire Door Manufacture

bmtrada Q-MARK CERTIFICATION

UKAS PRODUCT CERTIFICATION 0012

Rw 31 dB

Head Office: Dingle Road, Curraheen, Tralee, Co. Kerry, V92 EH6E.
Dublin Warehouse: 2 Cloverhill Industrial Estate, Dublin 22, D22 VP70.
P: (066) 71 94828 | W: www.deantadoors.ie | E: sales@deantadoors.ie