
déanta

Technical Data Sheet

HP16GWL EI30

EI30

WALNUT DOOR

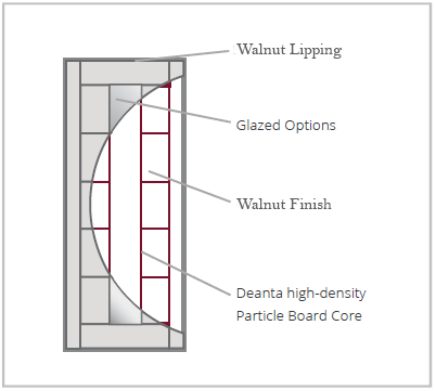



Timber Fire Door Manufacture

bmtrada Q-MARK CERTIFICATION

UKAS PRODUCT CERTIFICATION 0012

QUALITY CONTROL CHECKS

Type; Design	Fire Rated EI30
Construction	Glased (Unglazed / Bevelled) PBC
Durability	Pass
Finish	Walnut Vaneer (Water Based Lacquer) 40% Sheen

SPECIFICATIONS

Product Type	Internal door – Glased (Unglazed / Bevelled)
Intended use	Internal fire door
Lipping (stiles)	18mm Walnut
Lipping (rails)	11mm Walnut
Inner Lipping	N/A
Stiles/Rails/Core	Particle Board Core
Beadings	28.5 x 17mm (Standard HDF)
Panels	N/A
Finish	Walnut Vaneer (Water Based Lacquer) 40% Sheen
Door Weights	30-42 KG

SIZES AVAILABLE

2032 x 864 x 44mm
2032 x 813 x 44mm
1981 x 762 x 44mm
1981 x 711 x 44mm
1981 x 660 x 44mm
1981 x 610 x 44mm
1981 x 838 x 44mm

GLAZED OPTIONS

UG Unglazed

BV Bevelled

FIRE TESTING

Successfully fire tested in accordance with the requirements of **EN 1634-1**.
Certification Number: **WF399992 Rev E**
Efectis Extended Application Report: **EFR-23-005536-EXAP**

Head Office: Dingle Road, Curraheen, Tralee, Co. Kerry, V92 EH6E.
Dublin Warehouse: 2 Cloverhill Industrial Estate, Dublin 22, D22 VP70.
P: (066) 71 94828 | W: www.deantadoors.ie | E: sales@deantadoors.ie