
déanta

Technical Data Sheet

NM5OK EI30

EI30

OAK DOOR

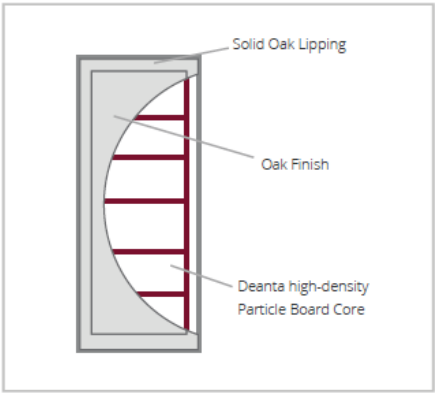



QUALITY CONTROL CHECKS

Type; Design	Fire Rated EI30
Construction	Solid Core PBC
Durability	Pass
Finish	American Oak Vaneer (Water Based Lacquer) 40% Sheen

SPECIFICATIONS

Product Type	Internal door – SC (Solid Core)
Intended use	Internal fire door
Lipping (stiles)	11mm Solid Oak
Lipping (rails)	11mm Solid Oak
Inner Lipping	3mm Lipping
Stiles/Rails/ Core	Particle Board Core
Beadings	N/A
Panels	Sandwiched MDF Fire Rated
Door Finish	American Oak Vaneer (Water Based Lacquer) 40% Sheen
Door Weights	27-33 KG

SIZES AVAILABLE

2032 x 864 x 44mm
2032 x 813 x 44mm
1981 x 838 x 44mm
1981 x 762 x 44mm
1981 x 711 x 44mm
1981 x 660 x 44mm
1981 x 610 x 44mm

ACOUSTIC RATING

31dB *Dropseals & Strips TBF
Exova Acoustics Ability Report:
BS EN ISO 10140-2:2010 / WYC384767

FIRE TESTING

Successfully fire tested in accordance with the requirements of **EN 1634-1**.
Certification Number: **WF399982 Rev C**
Efectis Extended Application Report: **EFR-23-005536-EXAP**

Timber Fire Door Manufacture

bmtrada Q-MARK CERTIFICATION

UKAS PRODUCT CERTIFICATION 0012

Rw 31 dB

Head Office: Dingle Road, Curraheen, Tralee, Co. Kerry, V92 EH6E.
Dublin Warehouse: 2 Cloverhill Industrial Estate, Dublin 22, D22 VP70.
P: (066) 71 94828 | W: www.deantadoors.ie | E: sales@deantadoors.ie