
déanta

Technical Data Sheet

HP22PG CT | 40

PRIMED DOOR



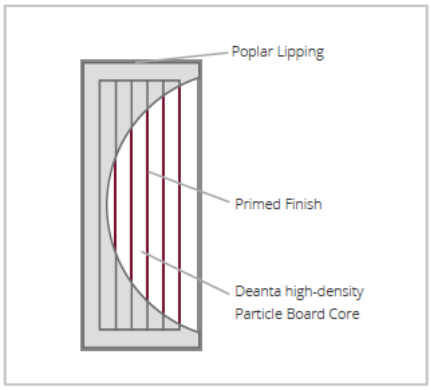

QUALITY CONTROL CHECKS

Type; Design	Internal Door
Construction	Solid Core PBC
Durability	Pass
Finish	Primed RAL 9007 White (Water based) Matt

SPECIFICATIONS

Product Type	Internal door – Solid Core
Intended use	Internal use
Lipping (stiles)	25 mm Poplar
Lipping (rails)	25 mm Poplar
Inner Lipping	N/A
Stiles/Rails/Core	Particle Board Core
Beadings	N/A
Panels	N/A
Door Finish	Primed RAL 9007 White (Water based)
Door Weights	CT: 27-38 KG | 40: 27- 33KG

SIZES AVAILABLE

2032 x 864 x 45mm
2032 x 813 x 45mm
1981 x 762 x 45mm
1981 x 711 x 45mm
1981 x 660 x 45mm
1981 x 661 x 45mm

1981 x 838 x 40mm
1981 x 762 x 40mm
1981 x 686 x 40mm

FINISHES AVAILABLE



Primed

Head Office: Dingle Road, Curraheen, Tralee, Co. Kerry, V92 EH6E.
Dublin Warehouse: 2 Cloverhill Industrial Estate, Dublin 22, D22 VP70.
P: (066) 71 94828 | W: www.deantadoors.ie | E: sales@deantadoors.ie