
déanta

Technical Data Sheet

VR2

PRIMED DOOR



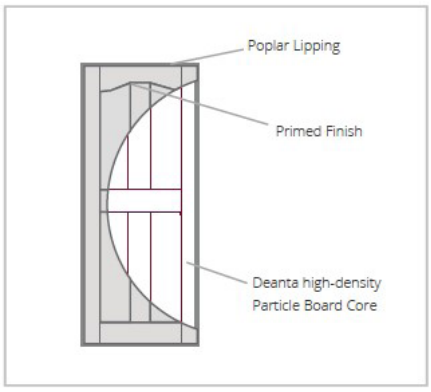

QUALITY CONTROL CHECKS

Type; Design	Internal Door
Construction	Solid Core PBC
Durability	Pass
Finish	Primed RAL 9007 White (Water based) Matt

SPECIFICATIONS

Product Type	Internal door – Solid Core
Intended use	Internal use
Lipping (stiles)	25 mm Poplar
Lipping (rails)	25 mm Poplar
Inner Lipping	N/A
Stiles/Rails/Core	Particle Board Core
Beadings	15mm x 14.5mm Standard MDF
Panels	Sandwiched MDF
Door Finish	Primed RAL 9007 White (Water based)
Door Weights	29-37 KG

SIZES AVAILABLE

2032 x 864 x 44mm
2032 x 813 x 44mm
1981 x 762 x 44mm
1981 x 711 x 44mm

FINISHES AVAILABLE

Primed

GLAZED OPTIONS

UG Unglazed | BV Bevelled | FL Flora | LU Luma

Head Office: Dingle Road, Curraheen, Tralee, Co. Kerry, V92 EH6E.
Dublin Warehouse: 2 Cloverhill Industrial Estate, Dublin 22, D22 VP70.
P: (066) 71 94828 | W: www.deantadoors.ie | E: sales@deantadoors.ie