
déanta

Technical Data Sheet

NM41GF

PRIMED DOOR



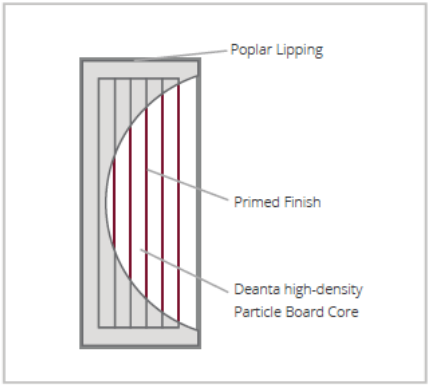

Timber Fire Door Manufacture

bmtrada Q-MARK CERTIFICATION

UKAS PRODUCT CERTIFICATION 0012

QUALITY CONTROL CHECKS

Type; Design	Internal Door
Construction	Glased (Unglazed / Bevelled) PBC
Durability	Pass
Finish	Primed RAL 9007 White (Water based) Matt

SPECIFICATIONS

Product Type	Internal door – Solid Core
Intended use	Internal fire door
Lipping (stiles)	18 mm Poplar
Lipping (rails)	18 mm Poplar
Inner Lipping	N/A
Stiles/Rails/Core	Chipboard + MDF
Beadings	55mm x 13mm Standard MDF
Panels	Sandwiched MDF
Door Finish	Primed RAL 9007 White (Water based) Matt
Door Weights	25-36 KG
Glass	7mm Obscure Glass

SIZES AVAILABLE

2032 x 864 x 42mm
2032 x 813 x 42mm
1981 x 838 x 42mm
1981 x 762 x 42mm

Head Office: Dingle Road, Curraheen, Tralee, Co. Kerry, V92 EH6E.
Dublin Warehouse: 2 Cloverhill Industrial Estate, Dublin 22, D22 VP70.
P: (066) 71 94828 | W: www.deantadoors.ie | E: sales@deantadoors.ie