
déanta
HARDWARE

Technical Data Sheet

BLASKET



A – 53mm | B – 130mm
C – 60mm | D – 10mm

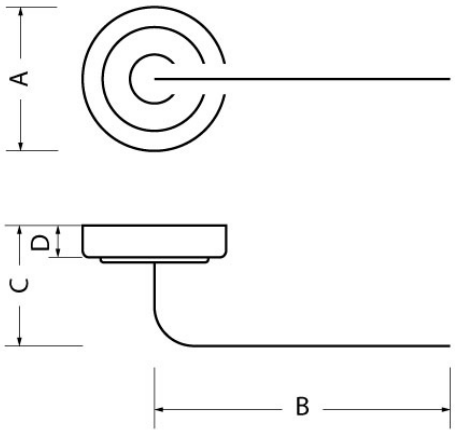

PRODUCT SPECIFICATIONS

+ BS EN 1634.1
+ Bolt through fixings included
+ Suitable for 35 -54mm Thickness Timber Doors

FIRE TESTING

Successfully fire tested in accordance with the requirements of BS EN 1634.1, suitable for use on 30 min fire doors

CODE	DESCRIPTION	FINISH	ADDITIONAL INFO.
LHH254	Blakset Handle Pair	Oil Rubbed Brass	Handle
LHH238	Blasket Handle Pair	Bright Coffee	Handle
LHH239	Blasket Handle Pair	Satin Nickel	Handle
LHH253	Blasket Handle Pair	Antique Brass	Handle

Head Office: Dingle Road, Curraheen, Tralee, Co. Kerry, V92 EH6E.
Dublin Warehouse: 2 Cloverhill Industrial Estate, Dublin 22, D22 VP70.
P: (066) 71 94828 | W: www.deantadoors.ie | E: sales@deantadoors.ie