

déanta
HARDWARE

Technical Data Sheet

SLANEY



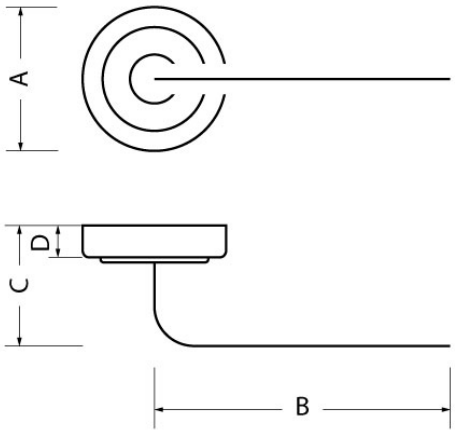

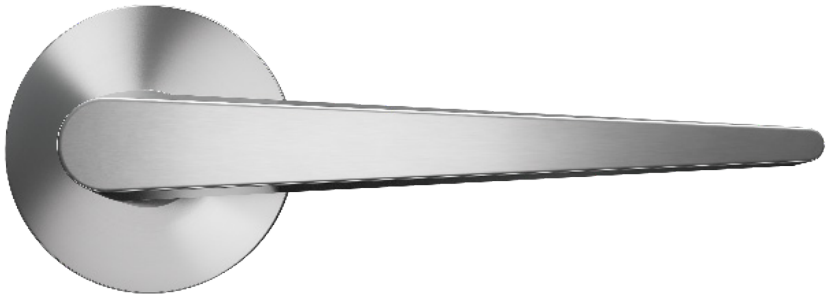

A – 53mm | B – 130mm
C – 60mm | D – 10mm

PRODUCT SPECIFICATIONS

+ BS EN 1634.1
+ Bolt through fixings included
+ Suitable for 35 -54mm Thickness Timber Doors

FIRE TESTING

Successfully fire tested in accordance with the requirements of BS EN 1634.1, suitable for use on 30 min fire doors

CODE	DESCRIPTION	FINISH	ADDITIONAL INFO.
LHH255	Slaney Handles per pair Zinc	Satin Nickel	Handle

Head Office: Dingle Road, Curraheen, Tralee, Co. Kerry, V92 EH6E.
Dublin Warehouse: 2 Cloverhill Industrial Estate, Dublin 22, D22 VP70.
P: (066) 71 94828 | W: www.deantadoors.ie | E: sales@deantadoors.ie