déanta HARDWARE

Technical Data Sheet

LHH608



PRODUCT SPECIFICATIONS

- **Power:** EN2 ~ EN5
- **Door Weight:** 25 -100Kg
- **Door width:** 900mm ~ 1200mm
- **Footprint:** 44 x 135 x 25mm
- **Opening Angles:** 180°
- **Adjustable latch speed**
- **Adjustable closing speed**
- **Backcheck/delay action optional**
- **Cover included**

CLASSIFICATION

*** 802-5CW when mounted in projection arm*

4	8	5 2	1	1	3

*** 802-5CW when mounted in transom mount*

3	8	5 2	1	1	3

*** 802-5CW when mounted in parallel arm*

3	8	4 2	1	1	3

FIRE TESTING

Successfully fire tested in accordance with the requirements of EN1154, suitable for use on 30, 60, 90 and 120-minute timber fire doors

CERTIFICATION


- **CE Marked**
- **CERTIFIRE Approved (Certificate CF5778)**
- **UKAS (Certificate 12961)**

STANDARDS

FD30/60 | EN 16341 STANDARDS | EN 1154 STANDARDS

DIMENSIONS - TECHNICAL

A - 227mm, B - 60mm, C - 43.5mm, D - 44mm, E - 135mm, F - 25mm

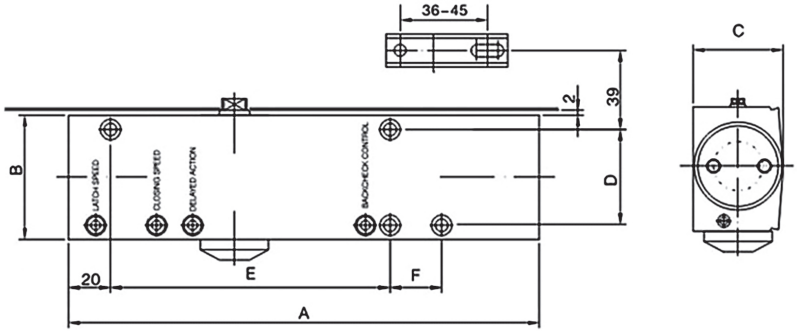

CODE	MODEL NO.	DESCRIPTION	FINISH	ADDITIONAL INFO.
LHH608	**802-5CW**	CERTIFIRE DoorCloser 120cm max100kg EN 2-5	Satin Silver	Cover Included
LHH608AB	**802-5CW inc Cover**	CERTIFIRE DoorCloser 120cm Max100kg EN2-5	Antique Brass	Cover Included
LHH608G	**802-5CW inc Cover**	CERTIFIRE DoorCloser 120cm Max100kg EN2-5	Satin Brass	Cover Included

Colours Available: Satin Silver | Antique Brass | Satin Brass

Head Office: Dingle Road, Curraheen, Tralee, Co. Kerry, V92 EH6E.
Dublin Warehouse: 2 Cloverhill Industrial Estate, Dublin 22, D22 VP70.
P: (066) 71 94828 | W: www.deantadoors.ie | E: sales@deantadoors.ie