déanta HARDWARE

Technical Data Sheet

LHH609



LHH610S Cover for LHH609S
LHH610W Cover for LHH609W

PRODUCT SPECIFICATIONS

- **Power:** EN3
- **Max Door Weight:** 40 - 65Kg
- **Max Door width:** 950mm
- **Footprint:** 165mm x 19mm
- **Opening Angles:** 180°
- **Adjustable latch speed**
- **Adjustable closing speed**

CLASSIFICATION

*** 5023AW when mounted in projection arm*

4	8	3	1	1	3

*** 5023AW when mounted in transom mount & parallel mount*

3	8	3	1	1	3

FIRE TESTING

Successfully fire tested in accordance with the requirements of EN1154, suitable for use on 30, 60, 90 and 120-minute timber fire doors


CERTIFICATION

- **CE Marked**
- **CERTIFIRE Approved (Certificate CF5778)**
- **UKAS (Certificate 12961)**

STANDARDS

FD30/60 | EN 1634.1 STANDARDS | EN 1154 STANDARDS

DIMENSIONS - TECHNICAL

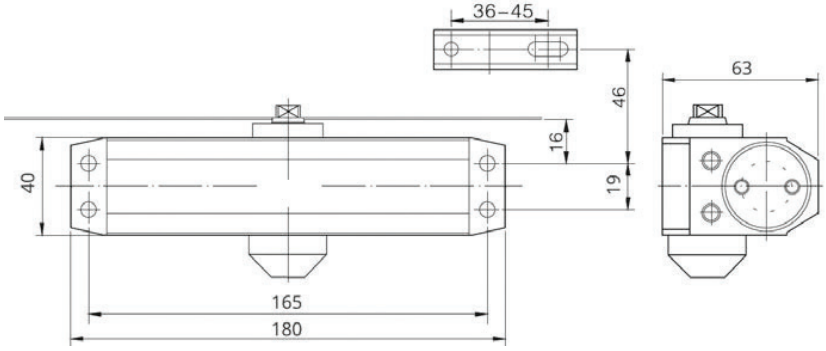

CODE	MODEL NO.	DESCRIPTION	FINISH	ADDITIONAL INFO.
LHH609S	**5023AW**	CERTIFIRE Door Closer 95cm Max 65 kg EN3 Adjustable	Silver	No Cover
LHH609W	**5023AW**	CERTIFIRE Door Closer 95cm Max 65 kg EN3 Adjustable	White	No Cover

Colours Available: Satin Nickel | Antique Brass | Matt Black | White

Head Office: Dingle Road, Curraheen, Tralee, Co. Kerry, V92 EH6E.
Dublin Warehouse: 2 Cloverhill Industrial Estate, Dublin 22, D22 VP70.
P: (066) 71 94828 | W: www.deantadoors.ie | E: sales@deantadoors.ie