
déanta HARDWARE

Technical Data Sheet

LHH613

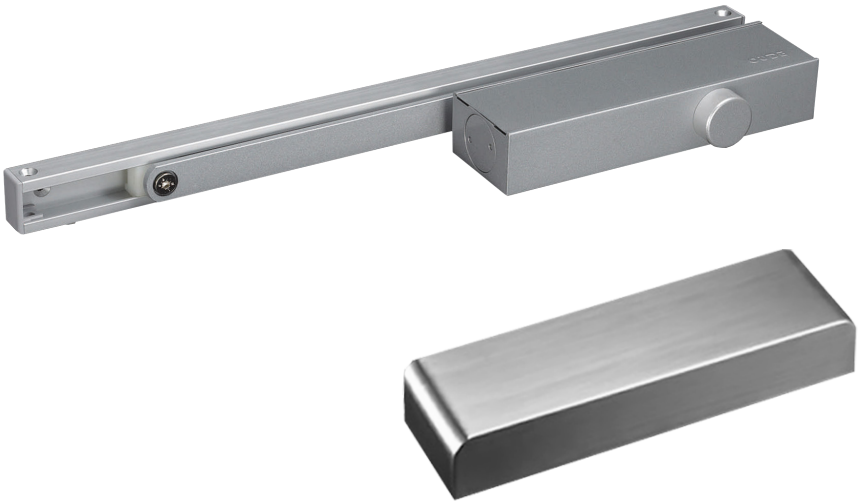

PRODUCT SPECIFICATIONS

- **Power:** EN3
- **Max Door Weight:** 65Kg
- **Max Door width:** 950mm
- **Footprint:** 50mm x 50mm x 43mm
- **Opening Angles:** 180°
- **Adjustable latch speed**
- **Adjustable closing speed**
- **Cover included**

CLASSIFICATION

*** D3023BW when mounted in projection arm*

3	8	4 2	1	1	3

*** D3023BW when mounted in parallel arm*

3	8	3	1	1	3

*** D3023BW when transom mounted in projecting arm*

3	8	4 2	1	1	3

FIRE TESTING


Successfully fire tested in accordance with the requirements of EN1634-1, suitable for use on 30, 60, 90 and 120-minute timber fire doors

CERTIFICATION

- **CE Marked**
- **CERTIFIRE Approved (Certificate CF5778)**
- **UKAS (Certificate 12961)**

DIMENSIONS - TECHNICAL

A -236mm, B - 60mm, C - 38.5mm, D - 43mm, E - 50mm, F -14mm

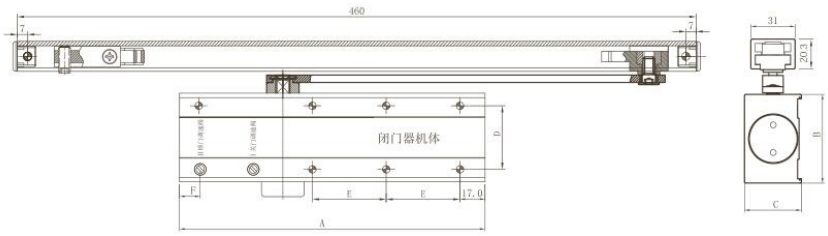

STANDARDS

FD30/60 | EN 1634-1 STANDARDS | EN 1154 STANDARDS

CODE	MODEL NO.	DESCRIPTION	FINISH	ADDITIONAL INFO.
LHH613AB	**1143AWH**	CERTIFIRE Sliding Arm Closer 95cm 65kg EN2-4	Antique Brass	Cover Included
LHH613B	**1143AWH**	CERTIFIRE Sliding Arm Closer 95cm 65kg EN2-4	Black	Cover Included
LHH613S	**1143AWH**	CERTIFIRE Sliding Arm Closer 95cm 65kg EN2-4	Silver	Cover Included

Colours Available: Satin Nickel | Antique Brass | Matt Black | White

Head Office: Dingle Road, Curraheen, Tralee, Co. Kerry, V92 EH6E.
Dublin Warehouse: 2 Cloverhill Industrial Estate, Dublin 22, D22 VP70.
P: (066) 71 94828 | W: www.deantadoors.ie | E: sales@deantadoors.ie